


6mm T/CU

One of the series of cartridges developed by Wes Ugalde and chambered originally by Thompson/Center Arms. This cartridge is essentially the .223 Remington case necked up to 6mm.

The 6mm T/CU is an effective varmint cartridge at ranges up to 200 yards.

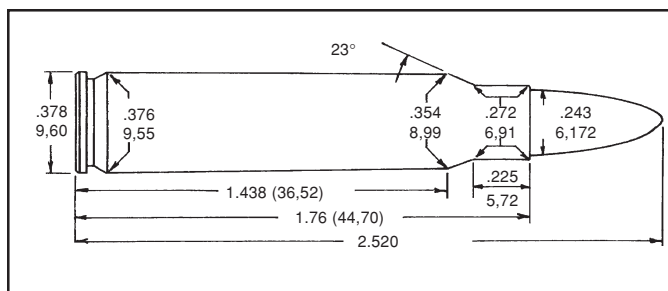

There is no SAAMI pressure limit for the 6mm T/CU. Based on the recommendations of Thompson/Center, our maximum pressures do not exceed that of the .223 Remington.

6mm T/CU				
Gun	DOUGLAS	Max Length	1.760"	
Barrel Length	14"	Trim Length	1.740"	
Primer	CCI 400	OAL Max	2.520"	
Case	REM	OAL Min	—	

Bullet	START LOADS			MAXIMUM LOADS			P.S.I.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
SRA 60 HP	2015	25.2	2515	2015	28.0	2858	47,400	2.320"	Compressed
	2230	25.7	2411	2230	28.5	2740	45,200		Case Full
	2460	26.1	2417	2460	29.0	2747	45,900		Case Full
	2495	24.3	2196	2495	27.0	2495	37,100		Compressed
	2520	26.1	2378	2520	29.0	2702	42,000		Compressed
HDY 70 SX	2015	24.3	2335	2015	27.0	2653	45,800	2.390"	Case Full
	2230	24.8	2277	2230	27.5	2588	45,900		
	2460	25.7	2325	2460	28.5	2642	46,600		
	2495	24.3	2185	2495	27.0	2483	40,300		Compressed
	2520	26.1	2285	2520	29.0	2597	43,000		Compressed
SPR 80 SP	2015	23.4	2236	2015	26.0	2541	47,600	2.380"	
	2230	24.3	2218	2230	27.0	2521	48,500		
	2460	24.8	2223	2460	27.5	2526	46,900		
	2495	24.3	2180	2495	27.0	2477	47,900		Compressed
	2520	25.2	2202	2520	28.0	2502	47,100		Compressed
SRA 85 HPBT	2015	22.5	2160	2015	25.0	2455	47,200	2.390"	
	2230	23.0	2119	2230	25.5	2408	48,200		
	2460	23.7	2153	2460	26.3	2447	49,400		
	2495	23.4	2119	2495	26.0	2408	48,600		Compressed
	2520	24.3	2182	2520	27.0	2480	48,700		