


7mm-08 REMINGTON

Available from Remington as a chambering in the XP-100 bolt action pistol, the 7mm-08 is a rifle cartridge that has gained a following among the ranks of IHMSA shooters as well as handgun hunters.

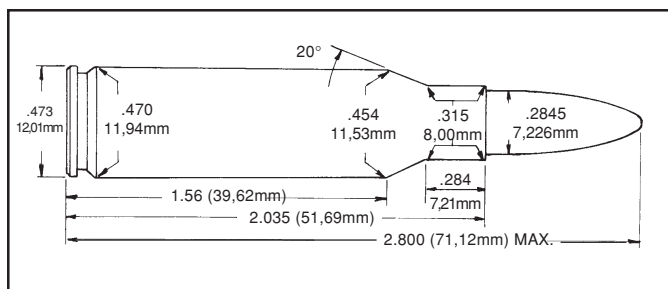

This cartridge/handgun combination should provide all the performance from a 7mm handgun that anyone could want.

The SAAMI Maximum Average Pressure for the 7mm-08 Remington is 52,000 C.U.P.

7mm-08 REMINGTON			
Gun	XP-100	Max Length	2.035"
Barrel Length	15"	Trim Length	2.015"
Primer	CCI 200	OAL Max	2.800"
Case	REM	OAL Min	2.530"

Bullet	START LOADS			MAXIMUM LOADS			C.U.P.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
SRA 100 HP	2015	36.5	2502	2015	40.5	2843	48,500	2.665"	
	2230	38.3	2557	2230	42.5	2906	49,800		
	2460	38.7	2567	2460	43.0	2917	49,500		
	2495	38.3	2411	2495	42.5	2740	48,500		
	2520	40.1	2559	2520	44.5	2908	48,400		
	2700	45.6	2573	2700	48.0	2737	50,700		
	4350	42.8	2227	4350	47.5	2531	44,200		Compressed
	3100	42.8	1978	3100	47.5	2248	40,600		Compressed
NOS 120 SP	2015	34.4	2312	2015	38.2	2627	49,000	2.765"	
	2230	36.3	2337	2230	40.3	2656	48,900		
	2460	36.6	2365	2460	40.7	2688	48,800		
	2495	36.0	2268	2495	40.0	2577	49,000		
	2520	37.3	2327	2520	41.4	2644	47,700		
	2700	44.2	2429	2700	46.5	2584	49,200		
	4350	42.8	2164	4350	47.5	2459	45,500		Compressed
	3100	42.8	1934	3100	47.5	2198	41,500		Compressed

Bullet	START LOADS			MAXIMUM LOADS			C.U.P.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
SPR 130 SP	2015	33.8	2236	2015	37.6	2541	52,000	2.770"	
	2230	35.4	2270	2230	39.3	2580	51,800		
	2460	35.8	2284	2460	39.8	2595	52,000		
	2495	35.1	2152	2495	39.0	2446	49,800		
	2520	35.6	2229	2520	39.6	2533	51,400		
	2700	42.8	2351	2700	45.0	2501	50,500		
	4350	42.8	2197	4350	47.5	2497	48,600		Compressed
	3100	42.8	1977	3100	47.5	2247	42,000		Compressed
SRA 140 SBT	2015	33.3	2161	2015	37.0	2456	49,300	2.800"	
	2230	35.1	2195	2230	39.0	2494	49,600		
	2460	36.0	2241	2460	40.0	2547	51,900		
	2495	34.7	2094	2495	38.5	2379	49,200		
	2520	35.6	2186	2520	39.5	2484	50,800		
	2700	42.3	2284	2700	44.5	2430	49,500		
	4350	42.8	2171	4350	47.5	2467	49,800		
	3100	42.8	1963	3100	47.5	2231	42,800		
SRA 150 SBT	2015	32.4	2064	2015	36.0	2346	50,300	2.800"	
	2230	34.2	2121	2230	38.0	2410	51,000		
	2460	34.5	2125	2460	38.3	2415	50,200		
	2495	33.6	2018	2495	37.3	2293	50,300		
	2520	35.1	2115	2520	39.0	2403	51,600		
	2700	41.3	2230	2700	43.5	2372	51,900		
	4350	41.9	2115	4350	46.5	2403	51,100		
	3100	42.3	1932	3100	47.0	2195	44,300		
NOS 160 SP (Part)	2015	31.5	1954	2015	35.0	2220	48,500	2.800"	
	2230	32.9	1971	2230	36.5	2240	47,300		
	2460	33.3	1985	2460	37.0	2256	48,500		
	2495	32.4	1897	2495	36.0	2156	49,900		
	2520	34.2	1988	2520	38.0	2259	48,500		
	2700	39.9	2079	2700	42.0	2212	45,600		
	4350	41.4	2036	4350	46.0	2314	49,400		Compressed
	3100	42.3	1899	3100	47.0	2158	43,400		Compressed
SRA 168 HPBT	2015	31.5	1936	2015	35.0	2200	49,300	2.800"	
	2230	33.3	1954	2230	37.0	2220	49,500		
	2460	33.3	1986	2460	37.0	2257	50,100		
	2495	34.2	1938	2495	38.0	2202	52,000		
	2520	33.3	1947	2520	37.0	2212	49,400		
	2700	37.8	1941	2700	42.0	2206	47,300		
	4350	41.4	2011	4350	46.0	2285	50,400		
	3100	42.3	1850	3100	47.0	2102	42,600		Compressed
REM 175 PSPCL	2015	31.5	1855	2015	35.0	2108	47,700	2.795"	
	2230	33.3	1921	2230	37.0	2183	49,600		
	2460	33.3	1916	2460	37.0	2177	49,800		
	2495	34.2	1823	2495	38.0	2072	47,900		
	2520	34.2	1914	2520	38.0	2175	51,200		
	2700	39.9	2019	2700	42.0	2148	47,400		
	4350	41.0	1937	4350	45.5	2201	49,400		
	3100	42.3	1778	3100	47.0	2070	42,600		Compressed