


# 7mm BR REMINGTON

The 7mm BR Remington started out as a member of a unique class of cartridges which are chambered in factory firearms but for which there was no factory ammunition. The current factory load from Remington features a 140-grain PSP at a muzzle velocity of 2215 fps.

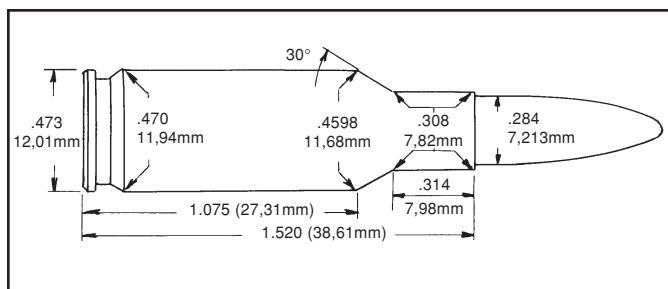

The 7mm BR is based on a thin-walled version of the .308 Winchester case that utilizes a small primer pocket and is shortened to 1.5".

The 7mm BR unprimed cases are now available from Remington. The 7mm BR provides an excellent combination of accuracy and power for metallic silhouette shooting. It is also suitable for hunting of deer-sized game within 200 yards. A major factor in this cartridge's popularity is the excellent accuracy and great strength of the XP-100 bolt action pistol.

The SAAMI Maximum Average Pressure for the 7mm BR Remington is 52,000 C.U.P.

7mm BR REMINGTON				
Gun	DOUGLAS	Max Length	1.520"	
Barrel Length	15"	Trim Length	1.500"	
Primer	REM 7°	OAL Max	--	
Case	REM	OAL Min	--	

Bullet	START LOADS			MAXIMUM LOADS			C.U.P.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
145 (L) GC	<b>5744</b>	16.0	1714	<b>5744</b>	22.0	2177	42,800	2.225"	Pennys
168 (L) GC	<b>5744</b>	15.0	1568	<b>5744</b>	21.0	2035	45,600	2.225"	Pennys
HDY 120 SSP	<b>2015</b>	26.1	2080	<b>2015</b>	29.0	2364	41,200	2.225"	Compressed
	<b>2230</b>	27.9	2077	<b>2230</b>	31.0	2360	44,300		
	<b>2460</b>	28.4	2089	<b>2460</b>	31.5	2374	42,900		
	<b>2495</b>	29.3	2142	<b>2495</b>	32.5	2434	41,900		
	<b>2520</b>	28.8	2109	<b>2520</b>	32.0	2397	43,600		
HDY 139 SP	<b>2015</b>	25.2	1928	<b>2015</b>	28.0	2191	40,400	2.305"	Compressed
	<b>2230</b>	27.0	1925	<b>2230</b>	30.0	2188	43,900		
	<b>2460</b>	27.9	1977	<b>2460</b>	31.0	2247	45,900		
	<b>2495</b>	28.4	1996	<b>2495</b>	31.5	2268	42,200		
	<b>2520</b>	27.9	1947	<b>2520</b>	31.0	2212	41,700		

## 7mm BR REMINGTON (continued)

Bullet	START LOADS			MAXIMUM LOADS			C.U.P.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
SRA 150 SBT	<b>2015</b>	24.8	1887	<b>2015</b>	27.5	2144	41,300	2.255"	Compressed
	<b>2230</b>	26.1	1868	<b>2230</b>	29.0	2123	43,200		
	<b>2460</b>	26.6	1892	<b>2460</b>	29.5	2150	44,100		
	<b>2495</b>	27.9	1981	<b>2495</b>	31.0	2251	45,100		
	<b>2520</b>	27.5	1917	<b>2520</b>	30.5	2178	43,100		
SRA 168 HPBT	<b>2015</b>	23.4	1724	<b>2015</b>	26.0	1959	41,100	2.310"	Compressed
	<b>2230</b>	25.2	1746	<b>2230</b>	28.0	1984	43,600		Compressed
	<b>2460</b>	25.7	1776	<b>2460</b>	28.5	2018	45,000		Compressed
	<b>2495</b>	25.7	1744	<b>2495</b>	28.5	1982	39,600		Compressed
	<b>2520</b>	27.0	1828	<b>2520</b>	30.0	2077	44,600		Compressed