


.45 WINCHESTER MAGNUM

The .45 Winchester Magnum was introduced in 1979 for use in the Wildey gas-operated semi-automatic pistol and has since been adopted as a standard chambering for the T/C Contender and the L.A.R. Grizzly Mag.

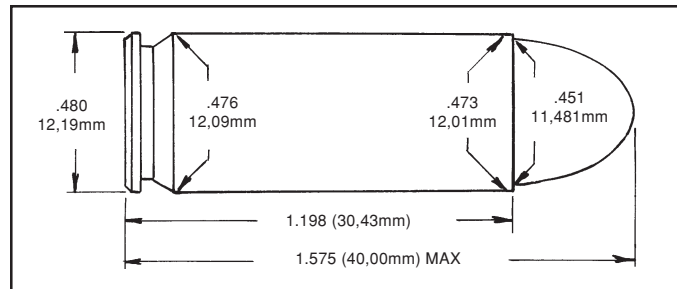

The .45 Winchester Magnum is basically a lengthened .45 ACP loaded to the same pressures as a .44 Remington Magnum. Originally intended for silhouette competition, with suitable bullets the .45 Winchester Magnum is as capable a hunting cartridge as the .44 Remington Magnum.

The longer barrel and solid breech of the T/C Contender allow the .45 Winchester Magnum to achieve its full potential.

Accurate Arms propellants produced excellent results with all bullet weights tested.

The SAAMI Maximum Average Pressure for the .45 Winchester Magnum is 40,000 C.U.P.

.45 WINCHESTER MAGNUM				
Gun	DOUGLAS	Max Length	1.198"	
Barrel Length	8"	Trim Length	1.188"	
Primer	WLP	OAL Max	1.575"	
Case	WW	OAL Min	1.545"	

Bullet	START LOADS			MAXIMUM LOADS			C.U.P.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
SRA 185 JHP	No.2	12.6	1379	No.2	14.0	1567	37,800	1.555"	Compressed
	No.5	15.3	1426	No.5	17.0	1620	36,200		
	No.7	18.9	1452	No.7	21.0	1650	35,800		
	No.9	27.0	1662	No.9	30.0	1889	35,200		
HDY 200 XTP	No.2	12.2	1332	No.2	13.5	1514	40,000	1.570"	
	No.5	15.3	1398	No.5	17.0	1589	36,600		
	No.7	18.5	1404	No.7	20.5	1595	34,700		
	No.9	26.6	1632	No.9	29.5	1854	38,400		
NOS 230 FMJ	No.2	11.3	1194	No.2	12.5	1357	38,200	1.575"	
	No.5	14.0	1258	No.5	15.5	1430	35,200		
	No.7	17.1	1294	No.7	19.0	1470	34,400		
	No.9	24.8	1529	No.9	27.5	1738	38,700		

Bullet	START LOADS			MAXIMUM LOADS			C.U.P.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
SRA 240 JHP	No.2	9.9	1060	No.2	11.0	1205	38,500	1.490"	
	No.5	13.0	1225	No.5	14.5	1400	40,000		
	No.7	17.1	1274	No.7	19.0	1448	34,800		
	No.9	21.6	1413	No.9	24.0	1606	40,000		
HDY 250 XTP	No.2	9.0	971	No.2	10.0	1103	40,000	1.480"	
	No.5	13.1	1184	No.5	14.5	1345	39,000		
	No.7	16.9	1280	No.7	18.8	1454	39,600		
	No.9	19.3	1315	No.9	21.5	1500	40,000		
SPR 260 SP	No.2	9.9	1000	No.2	11.0	1136	39,100	1.515"	
	No.5	13.1	1140	No.5	14.5	1295	38,800		
	No.7	17.1	1268	No.7	19.0	1441	38,500		
	No.9	20.7	1331	No.9	23.0	1512	37,100		
	1680	27.0	1209	1680	30.0	1374	31,300		Compressed
SPR 300 SP	No.2	9.0	854	No.2	10.0	970	37,400	1.565"	
	No.5	12.2	1005	No.5	13.5	1142	38,800		
	No.7	15.8	1110	No.7	17.5	1261	38,200		
	No.9	19.4	1234	No.9	21.5	1402	37,900		
	1680	25.2	1164	1680	28.0	1323	39,900		Compressed