


.219 ZIPPER

The .219 Zipper was introduced in 1937 by Winchester in the Model 64 rifle. It is based on the .25-35 Winchester case necked to .22 caliber. The Model 64 lever action rifle did not prove sufficiently accurate for long-range shooting

and did not allow easy use of telescopic sights. Winchester discontinued .219 Zipper ammunition in 1962 and Remington followed suit shortly thereafter.

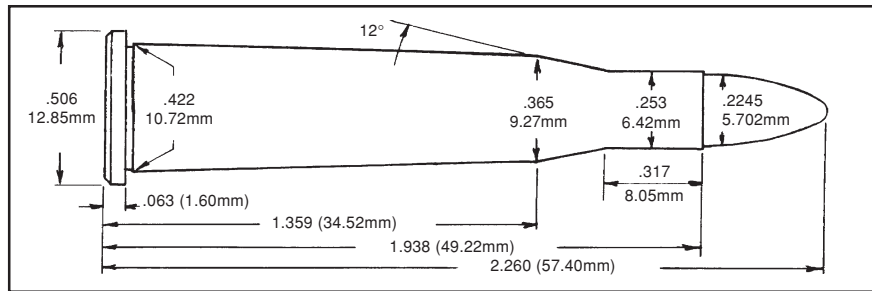

In a single shot or bolt action rifle, the .219 Zipper was considered as accurate as any other .22 centerfire cartridge in its class. When used in rifles with tubular magazines, bullet selection is limited to flat or round nose points thereby limiting long-range performance.

There is no longer a SAAMI specification for .219 Zipper ammunition. Because it is based on the same case and used in the same type of rifles as is the .25-35 and .30-30 Winchester cartridges, a pressure limit of 42,000 P.S.I. was used by Accurate Arms' technical staff.

.219 ZIPPER				
Gun	DOUGLAS	Max Length	1.938"	
Barrel Length	26"	Trim Length	1.928"	
Primer	CCI 200	OAL Max	2.260"	
Case	WW	OAL Min	--	

Bullet	START LOADS			MAXIMUM LOADS			P.S.I.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
SPR 46 FN	2015	21.6	2797	2015	24.0	3178	39,400	2.255"	Good load
	2230	23.0	2834	2230	25.5	3220	39,800		
	2460	23.4	2842	2460	26.0	3230	38,700		
	2495	24.3	2930	2495	27.0	3300	42,000		
	2520	24.8	2892	2520	27.5	3286	38,500		
	2700	27.9	2840	2700	31.0	3227	40,000		
HDY 50 SX *	2015	23.4	2844	2015	26.0	3232	40,800	2.350"	**
	2230	23.4	2811	2230	26.0	3194	40,800		
	2460	23.4	2778	2460	26.0	3157	37,900		
	2495	25.2	2913	2495	28.0	3310	42,000		
	2520	24.3	2814	2520	27.0	3198	38,400		
	2700	27.0	2700	2700	30.0	3068	36,300		

Bullet	START LOADS			MAXIMUM LOADS			P.S.I.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
NOS 55 SBT *	2015	22.5	2716	2015	25.0	3086	40,800	2.375"	**
	2230	23.4	2725	2230	26.0	3097	41,800		
	2460	23.9	2740	2460	26.5	3114	41,700		
	2495	23.9	2728	2495	26.5	3100	40,000		
	2520	23.9	2696	2520	26.5	3064	37,100		
	2700	27.0	2696	2700	30.0	3064	42,000		

* Not for use in tubular magazine

**Over SAAMI Maximum OAL