


.22 BR REMINGTON

This wildcat cartridge was developed from the Remington 7mm BR case. Like the 6mm BR Remington, (which is now available as a factory round), the .22 BR Remington is widely used by the benchrest shooting fraternity. In

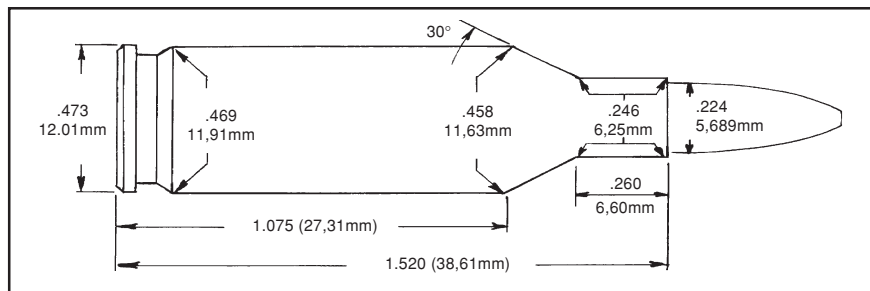

addition to its excellent accuracy, this cartridge produces surprisingly high velocities making it an excellent choice for long range varmint hunting.

There is no current SAAMI pressure limit for the .22 BR Remington. These loads are considered maximum by the Accurate Arms technical staff. The chamber of our pressure barrel is of "standard," not tight-necked, dimensions.

.22 BR REMINGTON

Gun	DOUGLAS	Max Length	1.520"
Barrel Length	26"	Trim Length	1.510"
Primer	REM 7½	OAL Max	--
Case	REM	OAL Min	--

Bullet	START LOADS			MAXIMUM LOADS			P.S.I.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
NOS 40 BT	5744	23.8	3381	5744	26.5	3843	55,500	2.065"	
	2015	27.9	3512	2015	31.0	3992	57,400		
	2230	30.6	3575	2230	34.0	4063	52,800		
	2460	31.0	3596	2460	34.5	4087	53,800		
	2495	29.2	3424	2495	32.5	3892	48,100		Compressed
	2520	31.0	3524	2520	34.5	4005	51,700		Compressed
	2700	31.9	3169	2700	35.5	3602	40,500		Compressed
NOS 45 Hornet	2015	27.5	3356	2015	30.5	3814	57,000	1.895"	
	2230	30.2	3417	2230	33.5	3883	57,400		
	2460	30.6	3443	2460	34.0	3913	57,600		
	2495	29.3	3281	2495	32.5	3728	48,100		Compressed
	2520	30.9	3428	2520	34.3	3896	55,300		Compressed
	2700	33.7	3359	2700	35.5	3573	46,700		Compressed
SPR 50 TNT	5744	23.4	3135	5744	26.0	3563	58,700	2.000"	
	2015	27.5	3282	2015	30.5	3729	55,900		
	2230	30.0	3313	2230	33.3	3765	56,000		
	2460	30.2	3311	2460	33.5	3762	54,900		
	2495	28.8	3132	2495	32.0	3559	45,400		Compressed
	2520	30.3	3301	2520	33.7	3751	54,900		Compressed
	2700	33.3	3267	2700	35.0	3476	46,900		Compressed

Bullet	START LOADS			MAXIMUM LOADS			P.S.I.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
HDY 53 HP	5744	22.5	3030	5744	25.0	3443	60,000	1.985"	Compressed
	2015	26.6	3150	2015	29.5	3579	56,600		
	2230	29.0	3183	2230	32.2	3617	57,900		
	2460	29.5	3215	2460	32.8	3653	57,300		
	2495	28.4	3116	2495	31.5	3541	52,400		
	2520	29.5	3186	2520	32.8	3620	56,400		
	2700	33.3	3111	2700	35.0	3310	46,600		
NOS 55 SBT	5744	22.0	2935	5744	24.5	3335	56,300	1.970"	Compressed Compressed Compressed
	2015	26.1	3071	2015	29.0	3490	56,500		
	2230	28.8	3138	2230	32.0	3566	55,700		
	2460	29.3	3172	2460	32.5	3605	59,900		
	2495	27.9	3033	2495	31.0	3447	49,600		
	2520	29.4	3159	2520	32.7	3590	57,400		
	2700	32.3	3156	2700	34.0	3357	47,600		
HDY 60 HP	5744	21.6	2826	5744	24.0	3211	56,000	1.990"	Compressed Compressed Compressed
	2015	25.7	2965	2015	28.5	3369	55,800		
	2230	28.1	3005	2230	31.2	3415	55,700		
	2460	28.5	3040	2460	31.7	3455	56,900		
	2495	27.9	3021	2495	31.0	3433	56,700		
	2520	28.4	2995	2520	31.5	3403	56,000		
	4064	29.2	3028	4064	32.5	3441	55,500		
2700	32.3	3122	2700	34.0	3321	51,900			