


# 6mm BR REMINGTON

The 6mm BR Remington is one of several cartridges available in the XP-100. Remington developed this cartridge from the popular 7mm BR cartridge case. While the 6mm BR has achieved significant popularity in handgun silhouette competition, it is also an able competitor in benchrest rifle matches. This cartridge also produces sufficiently high velocity to be classified as an effective varmint cartridge.

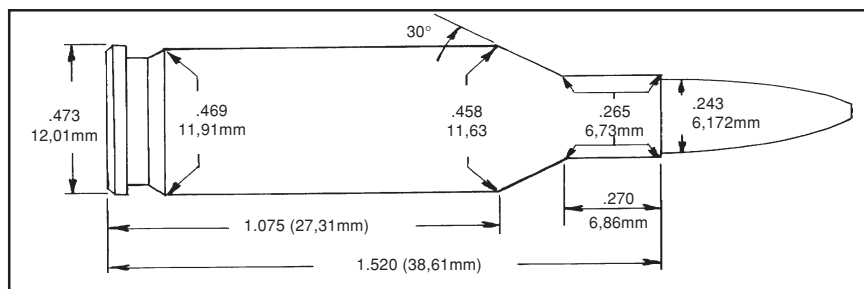

The SAAMI Maximum Average Pressure for the 6mm BR Remington is 52,000 C.U.P. Our data was measured in P.S.I. but does not exceed that pressure level.

6mm BR REMINGTON			
Gun	DOUGLAS	Max Length	1.520"
Barrel Length	24"	Trim Length	1.500"
Primer	REM 7°	OAL Max	2.200"
Case	REM	OAL Min	2.080"

Bullet	START LOADS			MAXIMUM LOADS			P.S.I.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
SRA 60 HP	<b>2015</b>	27.5	3055	<b>2015</b>	30.5	3472	52,700	2.125"	
	<b>2230</b>	30.2	3008	<b>2230</b>	33.5	3418	49,400		
	<b>2460</b>	31.1	3082	<b>2460</b>	34.5	3502	51,600		
	<b>2495</b>	29.7	2983	<b>2495</b>	33.0	3390	46,700		Compressed
	<b>2520</b>	31.5	3047	<b>2520</b>	35.0	3462	50,500		Compressed
	<b>2700</b>	33.3	2912	<b>2700</b>	35.0	3098	37,900		Compressed
SRA 70 HP	<b>2015</b>	27.5	2887	<b>2015</b>	30.5	3281	52,900	2.170"	
	<b>2230</b>	29.3	2865	<b>2230</b>	32.5	3256	52,500		
	<b>2460</b>	29.7	2882	<b>2460</b>	33.0	3275	51,600		
	<b>2495</b>	28.4	2871	<b>2495</b>	31.5	3262	50,500		Compressed
	<b>2520</b>	30.6	2889	<b>2520</b>	34.0	3283	51,900		Compressed
	<b>2700</b>	33.3	2772	<b>2700</b>	35.0	2949	37,900		Compressed
SPR 80 SP	<b>2015</b>	26.1	2679	<b>2015</b>	29.0	3044	50,200	2.120"	
	<b>2230</b>	27.9	2673	<b>2230</b>	31.0	3037	49,700		
	<b>2460</b>	28.8	2749	<b>2460</b>	32.0	3124	51,200		
	<b>2495</b>	27.0	2706	<b>2495</b>	30.0	3075	53,400		
	<b>2520</b>	29.7	2746	<b>2520</b>	33.0	3121	51,200		
	<b>2700</b>	33.3	2757	<b>2700</b>	35.0	2933	46,700		Compressed

## 6mm BR REMINGTON (continued)

Bullet	START LOADS			MAXIMUM LOADS			P.S.I.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
HDY 87 HPBT	<b>2015</b>	24.3	2512	<b>2015</b>	27.0	2855	52,000	2.225" *	Compressed
	<b>2230</b>	26.1	2512	<b>2230</b>	29.0	2855	50,500		
	<b>2460</b>	26.6	2539	<b>2460</b>	29.5	2885	50,700		
	<b>2495</b>	25.2	2541	<b>2495</b>	28.0	2888	51,200		
	<b>2520</b>	27.0	2545	<b>2520</b>	30.0	2892	51,800		
	<b>2700</b>	33.3	2747	<b>2700</b>	35.0	2922	53,000		
SPR 100 SBT	<b>2015</b>	22.5	2299	<b>2015</b>	25.0	2612	51,900	2.210" *	
	<b>2230</b>	25.2	2368	<b>2230</b>	28.0	2691	52,400		
	<b>2460</b>	25.2	2357	<b>2460</b>	28.0	2678	50,900		
	<b>2495</b>	23.4	2325	<b>2495</b>	26.0	2642	54,000		
	<b>2520</b>	25.7	2361	<b>2520</b>	28.5	2683	52,000		
	<b>2700</b>	30.4	2487	<b>2700</b>	32.0	2646	50,100		
SRA 107	<b>2015</b>	22.0	2184	<b>2015</b>	24.5	2482	52,600	2.355"	Compressed
	<b>2230</b>	23.8	2218	<b>2015</b>	26.5	2521	52,200		
	<b>2460</b>	24.7	2285	<b>2460</b>	27.5	2597	54,000		
	<b>2495</b>	23.8	2246	<b>2495</b>	26.5	2553	54,000		
	<b>2520</b>	24.3	2236	<b>2520</b>	27.0	2542	51,400		
	<b>4064</b>	26.1	2327	<b>4064</b>	29.0	2645	52,000		
<b>2700</b>	29.7	2367	<b>2700</b>	33.0	2690	54,300			
SRA 107 MC	<b>4064</b>	27.4	2379	<b>4064</b>	30.5	2704	51,800	2.355"	Moly-Coated

\* Over SAAMI Maximum OAL