


7mm-08 REMINGTON

The 7mm-08 Remington was originally a wildcat developed for the game of High Power Rifle Metallic Silhouette Shooting. Basically, the .308 Winchester case necked down to accept 7mm caliber bullets, the 7mm-08 will reliably topple rams at 500 meters without excessive recoil.

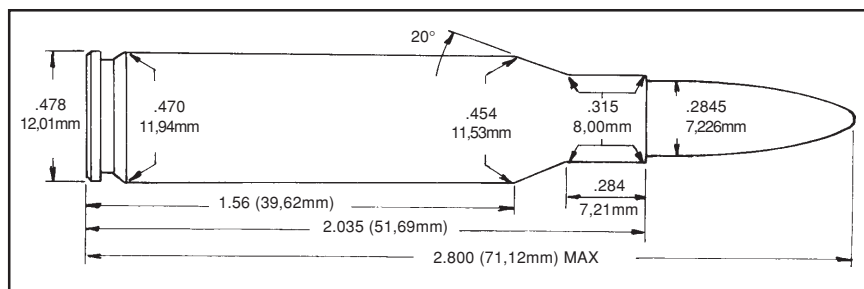

These attributes prompted Remington to introduce the 7mm-08 as a factory cartridge in 1980. After initial rave reviews by members of the gun press, the 7mm-08 Remington was almost forgotten. It has maintained a niche in the market because of its ability to produce excellent external ballistics in a short, handy carbine.

The 7mm-08 Remington is an excellent cartridge for deer-sized game and is, again in the hands of a skilled hunter, suitable for elk and moose when proper bullets are used.

The SAAMI Maximum Average Pressure for the 7mm-08 Remington is 52,000 C.U.P.

7mm-08 REMINGTON				
Gun	DOUGLAS	Max Length	2.035"	
Barrel Length	24"	Trim Length	2.015"	
Primer	CCI 200	OAL Max	2.800"	
Case	REM	OAL Min	2.530"	

Bullet	START LOADS			MAXIMUM LOADS			C.U.P.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
145 (L) GC	5744	20.0	1849	5744	27.0	2294	41,900	2.670"	Lyman
168 (L) GC	5744	20.0	1757	5744	27.0	2174	44,500	2.735"	Penny's
SRA 100 HP	2015	36.5	2749	2015	40.5	3124	48,500	2.665"	
	2230	38.3	2780	2230	42.5	3159	49,800		
	2460	38.7	2790	2460	43.0	3171	49,500		
	2495	38.3	2739	2495	42.5	3113	48,500		
	2520	40.1	2782	2520	44.5	3161	48,400		
	4064	41.4	2786	4064	46.0	3166	46,500		Compressed
	2700	45.6	2859	2700	48.0	3041	50,700		
4350	42.8	2531	4350	47.5	2876	44,200	Compressed		
3100	42.8	2248	3100	47.5	2555	40,600	Compressed		

7mm-08 REMINGTON (continued)

Bullet	START LOADS			MAXIMUM LOADS			C.U.P.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
NOS 120 SP	2015	34.4	2541	2015	38.2	2887	49,000	2.765"	
	2230	36.3	2541	2230	40.3	2887	48,900		
	2460	36.6	2571	2460	40.7	2922	48,800		
	2495	36.0	2577	2495	40.0	2928	49,000		
	2520	37.3	2529	2520	41.4	2874	47,700		
	4064	38.7	2603	4064	43.0	2958	48,100		
	2700	44.2	2699	2700	46.5	2871	49,200		
	4350	42.8	2459	4350	47.5	2794	45,500		Compressed
	3100	42.8	2198	3100	47.5	2498	41,500		Compressed
SPR 130 SP	2015	33.8	2457	2015	37.6	2792	52,000	2.770"	
	2230	35.4	2468	2230	39.3	2804	51,800		
	2460	35.8	2482	2460	39.8	2821	52,000		
	2495	35.1	2446	2495	39.0	2779	49,800		
	2520	35.6	2423	2520	39.6	2753	51,400		
	4064	38.2	2502	4064	42.5	2844	51,200		
	2700	42.8	2612	2700	45.0	2779	50,500		
	4350	42.8	2497	4350	47.5	2838	48,600		Compressed
	3100	42.8	2247	3100	47.5	2553	42,000		Compressed
SRA 140 SBT	2015	33.3	2375	2015	37.0	2699	49,300	2.800"	
	2230	35.1	2386	2230	39.0	2711	49,600		
	2460	36.0	2436	2460	40.0	2768	51,900		
	2495	34.7	2379	2495	38.5	2703	49,200		
	2520	35.6	2376	2520	39.5	2700	50,800		
	4064	37.8	2442	4064	42.0	2775	49,700		
	2700	42.3	2538	2700	44.5	2700	49,500		
	4350	42.8	2467	4350	47.5	2803	49,800		
	3100	42.8	2231	3100	47.5	2535	42,800		
SRA 150 SBT	2015	32.4	2269	2015	36.0	2578	50,300	2.800"	
	2230	34.2	2306	2230	38.0	2620	51,000		
	2460	34.5	2310	2460	38.3	2625	50,200		
	2495	33.6	2293	2495	37.3	2606	50,300		
	2520	35.1	2299	2520	39.0	2612	51,600		
	4064	36.9	2346	4064	41.0	2667	49,800		
	2700	41.3	2477	2700	43.5	2635	51,900		
	4350	41.9	2403	4350	46.5	2731	51,100		
	3100	42.3	2195	3100	47.0	2494	44,300		
NOS 160 (Part)	2015	31.5	2147	2015	35.0	2440	48,500	2.800"	
	2230	32.9	2143	2230	36.5	2435	47,300		
	2460	33.3	2158	2460	37.0	2452	48,500		
	2495	32.4	2156	2495	36.0	2450	49,900		
	2520	34.2	2160	2520	38.0	2455	48,500		
	4064	36.0	2246	4064	40.0	2553	51,700		
	2700	39.9	2311	2700	42.0	2458	45,600		
	4350	41.4	2314	4350	46.0	2630	49,400		Compressed
	3100	42.3	2158	3100	47.0	2452	43,400		Compressed

Bullet	START LOADS			MAXIMUM LOADS			C.U.P.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
SRA 168 HPBT	2015	31.5	2127	2015	35.0	2417	49,300	2.800"	Compressed
	2230	33.3	2123	2230	37.0	2413	49,500		
	2460	33.3	2159	2460	37.0	2453	50,100		
	2495	34.2	2202	2495	38.0	2502	52,000		
	2520	33.3	2116	2520	37.0	2404	49,400		
	4064	35.5	2153	4064	39.5	2447	48,600		
	2700	39.9	2157	2700	42.0	2451	47,300		
	4350	41.4	2284	4350	46.0	2596	50,400		
	3100	42.3	2102	3100	47.0	2389	42,600		
REM 175 PSPCL	2015	31.5	2038	2015	35.0	2316	47,700	2.795"	Compressed
	2230	33.3	2088	2230	37.0	2373	49,600		
	2460	33.3	2082	2460	37.0	2366	49,800		
	2495	34.2	2072	2495	38.0	2354	47,900		
	2520	34.2	2080	2520	38.0	2364	51,200		
	4064	35.5	2083	4064	39.5	2368	47,800		
	2700	39.9	2244	2700	42.0	2387	47,400		
	4350	41.0	2201	4350	45.5	2501	49,400		
	8700	42.3	2070	8700	47.0	2352	42,600		