


# .300 HOLLAND & HOLLAND MAGNUM

Introduced in 1925 by the British firm of Holland & Holland, the "Super .30" was first offered in the U.S. by the Western Cartridge Company. Although available as factory ammunition, no American-made commercial rifles were chambered for the .300 H&H until 12 years after its introduction.

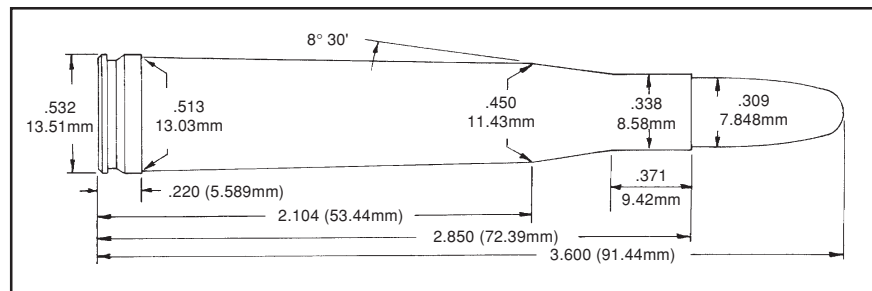

In 1935, Ben Comfort won the 1000-yard Wimbledon Cup Match with this cartridge and it then became the new sensation.

By 1937, Winchester had chambered the new Model 70 for the .300 H&H. Remington later followed with the Models 721 and 700 rifles.

The .300 H&H is very accurate, as well as being the most efficient of the .30-caliber "magnum" cartridges. It is suitable for all North American game as well as most thin-skinned game throughout the world.

When loaded to its SAAMI Maximum Average Pressure of 54,000 C.U.P. in a rifle of suitable barrel length (26"), the .300 H&H's performance is exceeded only by the .300 Weatherby Magnum.

| <b>.300 HOLLAND &amp; HOLLAND MAGNUM</b> |         |             |        |
|--|---------|-------------|--------|
| Gun                                      | DOUGLAS | Max Length  | 2.850" |
| Barrel Length                            | 26"     | Trim Length | 2.820" |
| Primer                                   | CCI 250 | OAL Max     | 3.600" |
| Case                                     | WW      | OAL Min     | 3.420" |

| Bullet     | START LOADS |        |      | MAXIMUM LOADS |        |      | C.U.P. | Cartridge |                          |
|------------|-------------|--------|------|---------------|--------|------|--------|-----------|--------------------------|
|            | Powder      | Grains | Vel. | Powder        | Grains | Vel. |        | Length    | Comment                  |
| 165 (L) GC | <b>5744</b> | 27.5   | 1924 | <b>5744</b>   | 35.0   | 2285 | 35,700 | 3.430"    | Penny's                  |
| 190 (L) GC | <b>5744</b> | 27.0   | 1849 | <b>5744</b>   | 35.0   | 2197 | 36,000 | 3.535"    | Penny's                  |
| 210 (L) GC | <b>5744</b> | 26.5   | 1748 | <b>5744</b>   | 35.0   | 2097 | 38,000 | 3.445"    | Penny's                  |
| NOS 125 BT | <b>2700</b> | 65.3   | 3084 | <b>2700</b>   | 72.5   | 3504 | 53,700 | 3.585"    | Compressed<br>Compressed |
|            | <b>4350</b> | 70.2   | 3066 | <b>4350</b>   | 78.0   | 3484 | 48,300 |           |                          |
|            | <b>3100</b> | 70.2   | 2814 | <b>3100</b>   | 78.0   | 3198 | 43,200 |           |                          |

| Bullet       | START LOADS |        |      | MAXIMUM LOADS |        |      | C.U.P. | Cartridge Length | Comment                               |
|--------------|-------------|--------|------|---------------|--------|------|--------|------------------|---------------------------------------|
|              | Powder      | Grains | Vel. | Powder        | Grains | Vel. |        |                  |                                       |
| HDY 150 SP   | <b>2700</b> | 62.2   | 2904 | <b>2700</b>   | 69.1   | 3300 | 54,000 | 3.555"           | Case Full<br>Compressed               |
|              | <b>4350</b> | 67.5   | 2932 | <b>4350</b>   | 75.0   | 3332 | 53,000 |                  |                                       |
|              | <b>3100</b> | 69.3   | 2801 | <b>3100</b>   | 77.0   | 3183 | 54,000 |                  |                                       |
| SPR 150 GRSL | <b>2700</b> | 62.6   | 2854 | <b>2700</b>   | 69.5   | 3244 | 52,800 | 3.530"           | Compressed                            |
|              | <b>4350</b> | 66.6   | 2958 | <b>4350</b>   | 74.0   | 3362 | 52,800 |                  |                                       |
|              | <b>3100</b> | 70.2   | 2762 | <b>3100</b>   | 78.0   | 3139 | 49,300 |                  |                                       |
| NOS 150 BT   | <b>2700</b> | 62.6   | 2847 | <b>2700</b>   | 69.5   | 3236 | 53,600 | 3.600"           | Compressed                            |
|              | <b>4350</b> | 66.6   | 2992 | <b>4350</b>   | 74.0   | 3400 | 54,000 |                  |                                       |
|              | <b>3100</b> | 68.8   | 2735 | <b>3100</b>   | 76.5   | 3109 | 48,300 |                  |                                       |
| BAR 165-X    | <b>2700</b> | 61.2   | 2686 | <b>2700</b>   | 68.0   | 3052 | 53,000 | 3.600"           | Case Full<br>Compressed               |
|              | <b>4350</b> | 64.8   | 2762 | <b>4350</b>   | 72.0   | 3139 | 54,000 |                  |                                       |
|              | <b>3100</b> | 70.2   | 2743 | <b>3100</b>   | 78.0   | 3117 | 49,600 |                  |                                       |
| SWF 165 SP   | <b>2700</b> | 58.5   | 2641 | <b>2700</b>   | 65.0   | 3001 | 52,100 | 3.520"           | Compressed                            |
|              | <b>4350</b> | 63.9   | 2827 | <b>4350</b>   | 71.0   | 3213 | 53,000 |                  |                                       |
|              | <b>3100</b> | 69.3   | 2736 | <b>3100</b>   | 77.0   | 3109 | 54,000 |                  |                                       |
| SRA 180 SP   | <b>2700</b> | 57.6   | 2580 | <b>2700</b>   | 64.0   | 2932 | 54,000 | 3.600"           | Case Full<br>Compressed<br>Compressed |
|              | <b>4350</b> | 64.4   | 2700 | <b>4350</b>   | 71.5   | 3068 | 54,000 |                  |                                       |
|              | <b>3100</b> | 65.7   | 2611 | <b>3100</b>   | 73.0   | 2967 | 53,800 |                  |                                       |
|              | <b>8700</b> | 76.5   | 2374 | <b>8700</b>   | 85.0   | 2698 | 46,300 |                  |                                       |
| SWF 180 SP   | <b>2700</b> | 57.6   | 2545 | <b>2700</b>   | 64.0   | 2892 | 54,000 | 3.520"           | Case Full<br>Compressed               |
|              | <b>4350</b> | 62.5   | 2704 | <b>4350</b>   | 69.5   | 3073 | 54,000 |                  |                                       |
|              | <b>3100</b> | 67.5   | 2708 | <b>3100</b>   | 75.0   | 3077 | 52,300 |                  |                                       |
|              | <b>8700</b> | 76.5   | 2420 | <b>8700</b>   | 85.0   | 2750 | 50,700 |                  |                                       |
| SWF 200 SP   | <b>2700</b> | 56.3   | 2413 | <b>2700</b>   | 62.5   | 2742 | 53,900 | 3.525"           | Compressed<br>Compressed              |
|              | <b>4350</b> | 58.9   | 2502 | <b>4350</b>   | 65.5   | 2843 | 53,200 |                  |                                       |
|              | <b>3100</b> | 63.9   | 2541 | <b>3100</b>   | 71.0   | 2887 | 52,500 |                  |                                       |
|              | <b>8700</b> | 73.8   | 2318 | <b>8700</b>   | 82.0   | 2634 | 49,900 |                  |                                       |
| SRA 200 HPBT | <b>2700</b> | 54.0   | 2426 | <b>2700</b>   | 60.0   | 2757 | 53,700 | 3.665" *         | Compressed                            |
|              | <b>4350</b> | 61.0   | 2563 | <b>4350</b>   | 67.8   | 2913 | 53,900 |                  |                                       |
|              | <b>3100</b> | 62.1   | 2468 | <b>3100</b>   | 69.0   | 2805 | 53,300 |                  |                                       |
|              | <b>8700</b> | 76.5   | 2262 | <b>8700</b>   | 85.0   | 2571 | 44,600 |                  |                                       |
| HDY 220 RN   | <b>2700</b> | 52.2   | 2255 | <b>2700</b>   | 58.0   | 2563 | 53,300 | 3.590"           | Compressed<br>Compressed              |
|              | <b>4350</b> | 60.5   | 2409 | <b>4350</b>   | 67.2   | 2738 | 54,000 |                  |                                       |
|              | <b>3100</b> | 63.9   | 2413 | <b>3100</b>   | 71.0   | 2743 | 53,300 |                  |                                       |
|              | <b>8700</b> | 76.5   | 2262 | <b>8700</b>   | 85.0   | 2571 | 44,600 |                  |                                       |

\* Over SAAMI Maximum OAL