


.356 WINCHESTER

This rimmed cartridge was introduced in 1980 concurrently with the Winchester Model 94 XTR Angle Eject lever action carbine.

Although still available as a chambering from U.S. Repeating Arms, this attempt to resurrect the .358 Winchester in rimmed form has not proven to be popular.

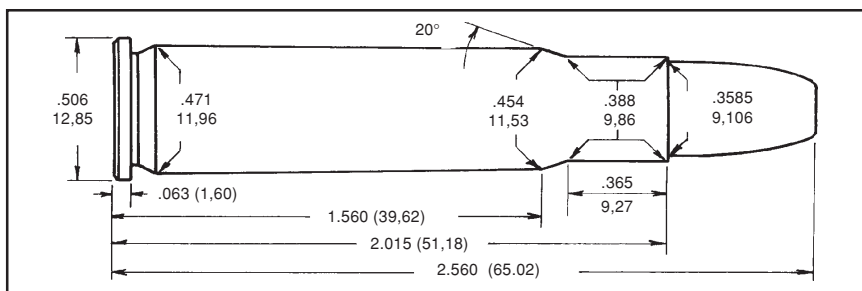

The SAAMI Maximum Average Pressure for the .356 Winchester is 52,000 C.U.P.

.356 WINCHESTER

| | | | |
|---------------|---------|-------------|--------|
| Gun | DOUGLAS | Max Length | 2.015" |
| Barrel Length | 24" | Trim Length | 1.995" |
| Primer | WLR | OAL Max | 2.560" |
| Case | WW | OAL Min | 2.530" |

| Bullet | START LOADS | | | MAXIMUM LOADS | | | C.U.P. | Cartridge Length | Comment |
|------------|-------------|--------|------|---------------|--------|------|--------|------------------|------------|
| | Powder | Grains | Vel. | Powder | Grains | Vel. | | | |
| SPR 180 FN | 2015 | 40.5 | 2379 | 2015 | 45.0 | 2703 | 46,300 | 2.545" | |
| | 2230 | 40.5 | 2207 | 2230 | 45.0 | 2508 | 45,500 | | |
| | 2460 | 41.4 | 2244 | 2460 | 46.0 | 2550 | 44,400 | | |
| | 2495 | 43.2 | 2177 | 2495 | 48.0 | 2474 | 37,600 | | Compressed |
| | 2520 | 44.1 | 2267 | 2520 | 49.0 | 2576 | 41,800 | | Compressed |
| | 2700 | 46.6 | 2161 | 2700 | 49.0 | 2299 | 40,600 | | Compressed |
| SPR 220 FN | 2015 | 35.1 | 2037 | 2015 | 39.0 | 2315 | 44,200 | 2.555" | |
| | 2230 | 36.0 | 1961 | 2230 | 40.0 | 2228 | 46,600 | | |
| | 2460 | 36.9 | 1992 | 2460 | 41.0 | 2264 | 45,300 | | |
| | 2495 | 40.5 | 2015 | 2495 | 45.0 | 2290 | 39,100 | | Compressed |
| | 2520 | 41.9 | 2116 | 2520 | 46.5 | 2404 | 45,400 | | Compressed |
| | 2700 | 45.6 | 2029 | 2700 | 48.0 | 2158 | 44,800 | | Compressed |