


.45 COLT CARBINE

The .45 Colt carbines are another example of Americans' affinity for a handgun and carbine chambered for the same cartridge.

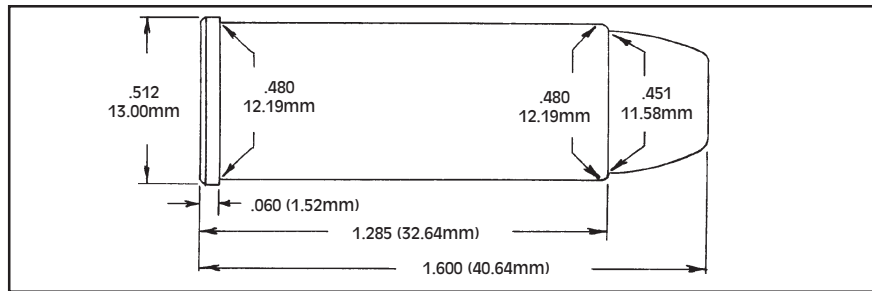

The data shown below are the same loads developed for use in the Ruger Revolver and T/C Contender single-shot handgun.

These loads were fired through a 16" barrel Winchester Model 94AE carbine.

Our data does not exceed the pressures of .45 ACP +P loads. These loads are intended only for use in modern carbines chambered for the .45 Colt cartridge.

.45 COLT CARBINE			
Gun	WIN 94 AE	Max Length	1.285"
Barrel Length	16"	Trim Length	1.265"
Primer	CCI 300	OAL Max	1.600"
Case	WW	OAL Min	1.550"

Bullet	START LOADS			MAXIMUM LOADS			C.U.P.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
215 (L) SWC/GC	N100	8.1	1125	N100	9.0	1278	20,700	1.550"	Penny's
	No.5	12.2	1189	No.5	13.6	1351	20,800		
	No.7	14.9	1181	No.7	16.6	1342	20,900		
225 (L) SWC	N100	7.9	1121	N100	8.8	1274	20,800	1.575"	Penny's
	No.5	12.2	1186	No.5	13.6	1348	21,400		
	No.7	14.8	1173	No.7	16.4	1333	21,000		
230 (L) RN	N100	7.7	1062	N100	8.6	1207	20,300	1.600"	CP
	No.5	12.2	1171	No.5	13.5	1331	20,900		
	No.7	14.6	1148	No.7	16.2	1304	20,600		
240 (L) SWC	N100	7.6	1084	N100	8.4	1232	20,300	1.570"	Clements
	No.5	11.1	1121	No.5	12.3	1274	20,000		
	No.7	14.1	1163	No.7	15.7	1322	20,600		
255 (L) SWC	N100	7.3	1035	N100	8.1	1176	20,200	1.600"	LY452424
	No.5	10.6	1037	No.5	11.8	1178	18,200		
	No.7	13.6	1093	No.7	15.1	1242	19,700		
	No.9	15.8	1101	No.9	17.6	1251	20,100		

.45 COLT CARBINE (continued)

Bullet	START LOADS			MAXIMUM LOADS			C.U.P.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
280 (L) TC	N100	6.9	951	N100	7.7	1081	19,100	1.650" * LBT	
	No.5	9.9	971	No.5	11.0	1103	18,300		
	No.7	12.6	1128	No.7	14.0	1282	19,000		
	No.9	15.8	1198	No.9	17.5	1361	19,300		
300 (L) FN	N100		N/R	N100		N/R		1.585" D&J	
	No.5		N/R	No.5		N/R			
	No.7	11.7	1005	No.7	13.0	1142	19,200		
	No.9	13.5	1001	No.9	15.0	1138	17,600		
SRA 200 FPJ	N100	8.3	1136	N100	9.2	1291	19,300	1.585"	
	No.5	13.1	1234	No.5	14.6	1402	20,000		
	No.7	14.8	1083	No.7	16.4	1231	15,300		
HDY 230 RN FMJ	N100	7.8	1067	N100	8.7	1213	19,600	1.600"	
	No.5	11.7	1117	No.5	13.0	1269	18,600		
	No.7	13.9	1076	No.7	15.4	1223	18,500		
SRA 240 JHC	N100	7.7	1030	N100	8.5	1170	20,100	1.590"	
	No.5	11.7	1067	No.5	13.0	1212	18,300		
	No.7	14.0	1081	No.7	15.5	1228	20,400		
NOS 250 JHP	N100	7.5	967	N100	8.3	1099	19,300	1.585"	
	No.5	10.9	983	No.5	12.1	1117	18,100		
	No.7	13.7	1058	No.7	15.2	1202	19,600		
SPR 260 JHP	N100	7.3	950	N100	8.1	1080	19,700	1.585"	
	No.5	10.7	1000	No.5	11.9	1136	19,300		
	No.7	13.5	1046	No.7	15.0	1189	19,400		
SPR 300 SP	N100		N/R	N100		N/R		1.585"	
	No.5		N/R	No.5		N/R			
	No.7	11.7	900	No.7	13.0	1023	20,300		
	No.9	13.5	906	No.9	15.0	1030	19,200		
HDY 300 XTP	N100		N/R	N100		N/R		1.580"	
	No.5		N/R	No.5		N/R			
	No.7	11.7	906	No.7	13.0	1030	20,200		
	No.9	13.5	956	No.9	15.0	1086	19,500		

* Over SAAMI Maximum OAL