


6mm BR REMINGTON

The 6mm BR Remington is the 7mm BR case necked down. Remington chambers their Model XP-100 pistol for this cartridge.

The 6mm BR Remington is effective on small game up to a range of 200 yards.

The SAAMI Maximum Average Pressure for the 6mm BR Remington is 52,000 C.U.P. We developed the data in our test barrel in P.S.I. Loads producing 54,000 P.S.I. in our pressure barrel produced 50,000 C.U.P. These loads do not exceed that pressure.

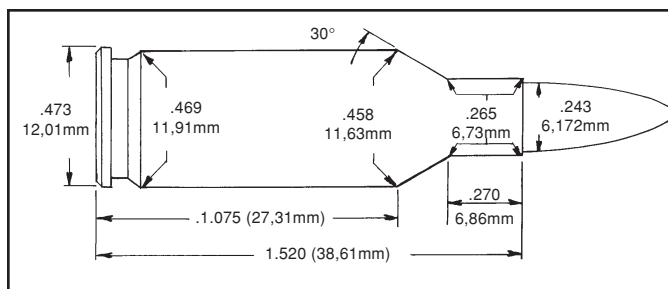

| 6mm BR REMINGTON | | | |
|------------------|--------|-------------|--------|
| Gun | XP-100 | Max Length | 1.520" |
| Barrel Length | 14°" | Trim Length | 1.552" |
| Primer | REM 7° | OAL Max | 2.200" |
| Case | REM | OAL Min | 2.080" |

| Bullet | START LOADS | | | MAXIMUM LOADS | | | P.S.I. | Cartridge Length | Comment |
|-----------|-------------|--------|------|---------------|--------|------|--------|------------------|------------|
| | Powder | Grains | Vel. | Powder | Grains | Vel. | | | |
| SRA 60 HP | 2015 | 27.5 | 2750 | 2015 | 30.5 | 3125 | 52,700 | 2.125" | |
| | 2230 | 30.2 | 2707 | 2230 | 33.5 | 3076 | 49,400 | | |
| | 2460 | 31.1 | 2774 | 2460 | 34.5 | 3152 | 51,600 | | |
| | 2495 | 29.7 | 2685 | 2495 | 33.0 | 3051 | 46,700 | | Compressed |
| | 2520 | 31.5 | 2742 | 2520 | 35.0 | 3116 | 50,500 | | Compressed |
| | 2700 | 33.3 | 2621 | 2700 | 35.0 | 2788 | 37,900 | | Compressed |
| SRA 70 HP | 2015 | 27.5 | 2599 | 2015 | 30.5 | 2953 | 52,900 | 2.170" | |
| | 2230 | 29.3 | 2578 | 2230 | 32.5 | 2930 | 52,500 | | |
| | 2460 | 29.7 | 2594 | 2460 | 33.0 | 2948 | 51,600 | | |
| | 2495 | 28.4 | 2584 | 2495 | 31.5 | 2936 | 50,500 | | Compressed |
| | 2520 | 30.6 | 2600 | 2520 | 34.0 | 2955 | 51,900 | | Compressed |
| | 2700 | 33.3 | 2495 | 2700 | 35.0 | 2654 | 37,900 | | Compressed |
| SPR 80 SP | 2015 | 26.1 | 2411 | 2015 | 29.0 | 2740 | 50,200 | 2.120" | |
| | 2230 | 27.9 | 2405 | 2230 | 31.0 | 2733 | 49,700 | | |
| | 2460 | 28.8 | 2475 | 2460 | 32.0 | 2812 | 51,200 | | |
| | 2495 | 27.0 | 2436 | 2495 | 30.0 | 2768 | 53,400 | | |
| | 2520 | 29.7 | 2472 | 2520 | 33.0 | 2809 | 51,200 | | |
| | 2700 | 33.3 | 2482 | 2700 | 35.0 | 2640 | 46,700 | | Compressed |

6mm BR REMINGTON (continued)

| Bullet | START LOADS | | | MAXIMUM LOADS | | | P.S.I. | Cartridge Length | Comment |
|-------------|-------------|--------|------|---------------|--------|------|--------|------------------|------------|
| | Powder | Grains | Vel. | Powder | Grains | Vel. | | | |
| HDY 87 HPBT | 2015 | 24.3 | 2262 | 2015 | 27.0 | 2570 | 52,000 | 2.225" * | |
| | 2230 | 26.1 | 2262 | 2230 | 29.0 | 2570 | 50,500 | | |
| | 2460 | 26.6 | 2285 | 2460 | 29.5 | 2597 | 50,700 | | |
| | 2495 | 25.2 | 2287 | 2495 | 28.0 | 2599 | 51,200 | | |
| | 2520 | 27.0 | 2291 | 2520 | 30.0 | 2603 | 51,800 | | |
| | 2700 | 33.3 | 2472 | 2700 | 35.0 | 2630 | 53,000 | | Compressed |
| SPR 100 SBT | 2015 | 22.5 | 2069 | 2015 | 25.0 | 2351 | 51,900 | 2.210" * | |
| | 2230 | 25.2 | 2131 | 2230 | 28.0 | 2422 | 52,400 | | |
| | 2460 | 25.2 | 2121 | 2460 | 28.0 | 2410 | 50,900 | | |
| | 2495 | 23.4 | 2093 | 2495 | 26.0 | 2378 | 54,000 | | |
| | 2520 | 25.7 | 2125 | 2520 | 28.5 | 2415 | 52,000 | | |
| | 2700 | 30.4 | 2238 | 2700 | 32.0 | 2381 | 50,100 | | |

* Over SAAMI MAX OAL