


.35 REMINGTON

The .35 Remington chambering in the XP-100 and T/C Contender is a favorite of both handgun hunters and the silhouette crowd.

The velocity loss in the 14" barrel of the Contender, compared to a rifle, is not significant. Loading spitzer bullets for the T/C pistol will improve downrange ballistics. Accuracy of the Contender and XP-100 handgun is usually very good with both jacketed and cast bullets.

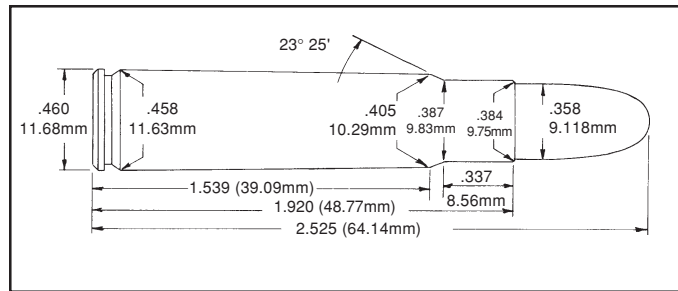

The SAAMI Maximum Average Pressure for the .35 Remington is 33,500 P.S.I.

.35 REMINGTON			
Gun	T/C	Max Length	1.920"
Barrel Length	14"	Trim Length	1.900"
Primer	CCI 200	OAL Max	2.525"
Case	REM	OAL Min	2.460"

Bullet	START LOADS			MAXIMUM LOADS			P.S.I.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
200 (L) FNGC	2015	30.9	1529	2015	32.5	1627	30,800	2.410"	RCBS 35-200 FN
	2230	30.9	1560	2230	32.5	1660	29,700		
	2460	32.3	1604	2460	34.0	1706	30,300		
	2495	38.0	1700	2495	40.0	1809	24,000		
	2520	36.1	1763	2520	38.0	1875	30,900		
250 (L) SPGC	2015	25.7	1451	2015	27.0	1544	31,800	2.685"	* RCBS 35-250-SP
	2230	27.6	1543	2230	29.0	1641	33,500		
	2460	30.4	1614	2460	32.0	1717	32,200		
	2495	33.3	1595	2495	35.0	1697	26,100		
	2520	30.4	1550	2520	32.0	1649	30,700		
HDY 180 SSP	2015	33.7	1646	2015	35.5	1751	28,600	2.560"	*
	2230	33.7	1666	2230	35.5	1772	28,100		
	2460	34.2	1678	2460	36.0	1785	27,500		
	2495	38.0	1727	2495	40.0	1837	27,400		
	2520	36.1	1751	2520	38.0	1863	28,100		